

# BUNN®

## 12 Cup Automatic Coffee Brewer with 3 Lower Warmers

ITEM# \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_

### Features

#### 12 Cup Automatic Coffee Brewer

- Brews 3.9 to 7.5 gallons (14.8 to 28.4 litres) of perfect coffee per hour.
- All stainless steel construction.
- Hot water faucet and back-up pourover feature on all CWTF models. No faucet on CWT model.
- SplashGard® funnel deflects hot liquids away from the hand.
- International electrical configurations available.



#### Model CWTF15-3\*

(3 lower warmers)

(decanters sold separately)

Dimensions: 17" H x 16.5" W x 17.7" D

(43.2cm H x 41.9cm W x 45cm D)



#### Model CWT15-3\*

(no faucet)

For current specification sheets and other information, go to [www.bunn.com](http://www.bunn.com).

\* International models may vary in appearance.

### Related Products

#### Easy Clear® EQ-17-TL

Product No. : 30200.1000

Dimensions:

12<sup>7</sup>/<sub>16</sub>" H x 2<sup>1</sup>/<sub>2</sub>" W x 3" D

31.6 cm H x 6.35 cm W x 7.62 cm D



#### Paper Filter Pack

Product No. : 20115.0000

Packed per case: 1,000

Dimensions: 4<sup>1</sup>/<sub>4</sub>" Base x 2<sup>3</sup>/<sub>4</sub>" Sidewall

10.8 cm Base x 6.98 cm Sidewall



#### 1GPR SS Portable Server on an RWS1 Warmer

1GPR Product No. : 12487.0001\*

RWS1 Product No. : 12203.0010

\*Also available with side handles or black decor.



#### Easy Clear® ED-17-TL

Product No. : 30201.1001

Dimensions: 8<sup>1</sup>/<sub>4</sub>" H x 2<sup>5</sup>/<sub>16</sub>" Dia.

20.95 cm H x 5.87 cm Dia.

#### Easy Pour® black decanter

Product No. : 06100.0101

Quantity: 1 (also packaged in quantities of 2, 3, 6, 12, & 24)



#### Easy Pour® orange decanter (for decaf)

Product No. : 06101.0101

Quantity: 1 (also packaged in quantities of 2, 3, 6, 12, & 24)

#### Model

#### Agency Listing

CWT15-3



CWTF15-3



CWTF20-3



CWTF35-3



## Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Cubic Measure	Shipping Weight	Cord Attached
CWT15-3 <sup>††</sup>	12950.0112	120	13.9	1320	1670	3.9 gal./hr.	6.4 ft <sup>3</sup>	32 lbs.	Yes
CWTF15-3	12950.0212	120	13.9	1320	1670	3.9 gal./hr.	6.4 ft <sup>3</sup>	35 lbs.	Yes
CWTF15-3*	12950.0216	120	13.9	1320	1670	3.9 gal./hr.	6.4 ft <sup>3</sup>	36 lbs.	Yes
CWTF20-3	12950.0232	120	17.9	1800	2150	5.3 gal./hr.	6.4 ft <sup>3</sup>	35 lbs.	No
CWTF35-3	12950.0252	120/208-240	17.1 <sup>†</sup>	3500	3850	7.5 gal./hr.	6.4 ft <sup>3</sup>	35 lbs.	No
CWTF15	12950.0298	120	13.9	1320	1670	3.9 gal./hr.	6.4 ft <sup>3</sup>	35 lbs.	Yes
(3 left lower warmers)									
CWTF35*	12950.0381	120/208-240	17.1 <sup>†</sup>	3500	3850	7.5 gal./hr.	6.4 ft <sup>3</sup>	39 lbs.	No

\*Stainless steel funnel <sup>†</sup>Current at 240 Volts <sup>††</sup>No faucet

**Brewing capacity:** based upon incoming water temp of 60°F/15°C (140°F/60°C rise) per 1/2 gallon brew time of 4 minutes.


Models listed as 120/208V or 120/240V must be connected to 208V or 240V electrical service respectively. Please refer to the installation manual.

Electrical: Model 15 requires 2-wires plus ground service rated 120V, single phase, 60 Hz.

Model 20 requires 2-wires plus ground service rated 120V, single phase, 60 Hz.

Model 35 requires 3-wires plus ground service rated 120/208 or 120/240V, single phase, 60 Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 1/4" male flare fitting.

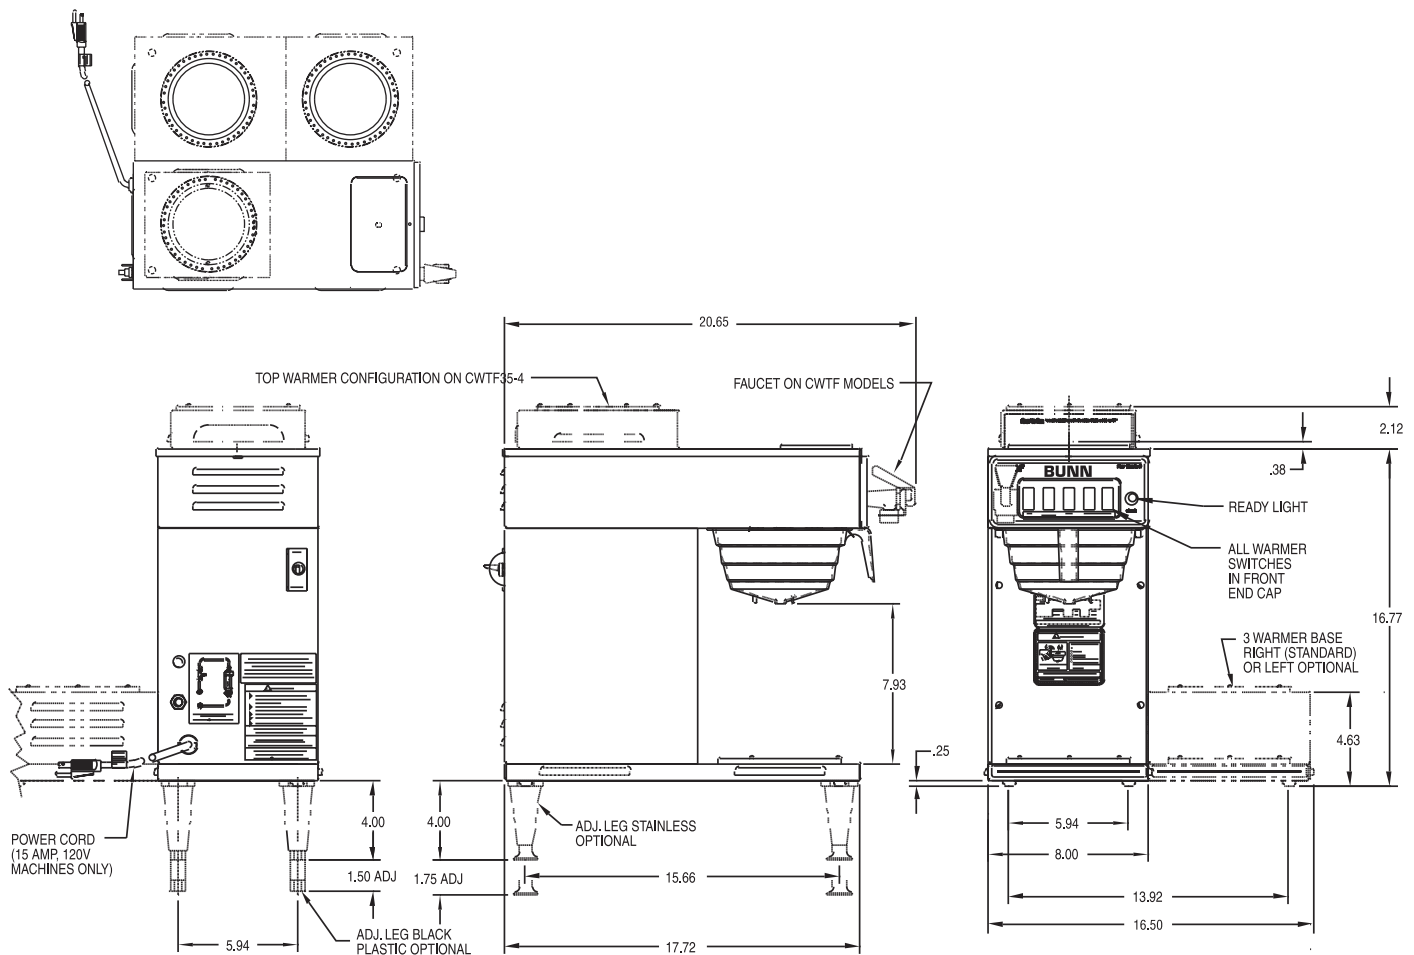

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches.