



ROYAL SERIES PLUMBING

SINGLE WALL MOUNT UTILITY SPRAY

MODEL: **19-101L** PROJECT: _____ ITEM #: _____ QTY: _____

PRODUCT IMAGE



19-101L SHOWN

**19-101L ONLY AVAILABLE IN
LOW LEAD COMPLIANT MODEL**

STANDARD FEATURES

- 1/4 turn high performance ceramic cartridge valves with built-in back flow preventers
- Angled spray head
- Built-in vacuum breaker
- 72" heavy-duty stainless steel clad flexible hose. Tested to 400 PSI
- Plastic coated wall hook with chrome plated base
- Full replacement parts available
- 1 year warranty
- Mounting kit included
- **Low Lead Compliance**
Meets California AB-1953 and Vermont S152 standards

SPECIFICATIONS

- Single hole wall mount with 1/2" NPT male inlet
- Rough in: 7/8" round hole
- Temperature Range: 40°F to 180°F
- Flow rate: 1.6 GPM max @ 60 PSI
- Shipping weight: 15 lbs.



APPROVED BY:

CERTIFICATIONS:

Due to our commitment to continued product improvement, specifications are subject to change without notice.

Printed in the USA

Krowne Metal Corporation

100 Haul Rd. Wayne, NJ 07470 • Toll Free: (800) 631-0442 • Fax: (973) 872-1129
sales@krowne.com • www.krowne.com • www.facebook.com/KrowneMetal • www.twitter.com/KrowneMetal


Rev. 09/2011
No. 19-101L



ROYAL SERIES PLUMBING SINGLE WALL MOUNT UTILITY SPRAY

MODEL: **19-101L** PROJECT: _____ ITEM #: _____ QTY: _____

DRAWING

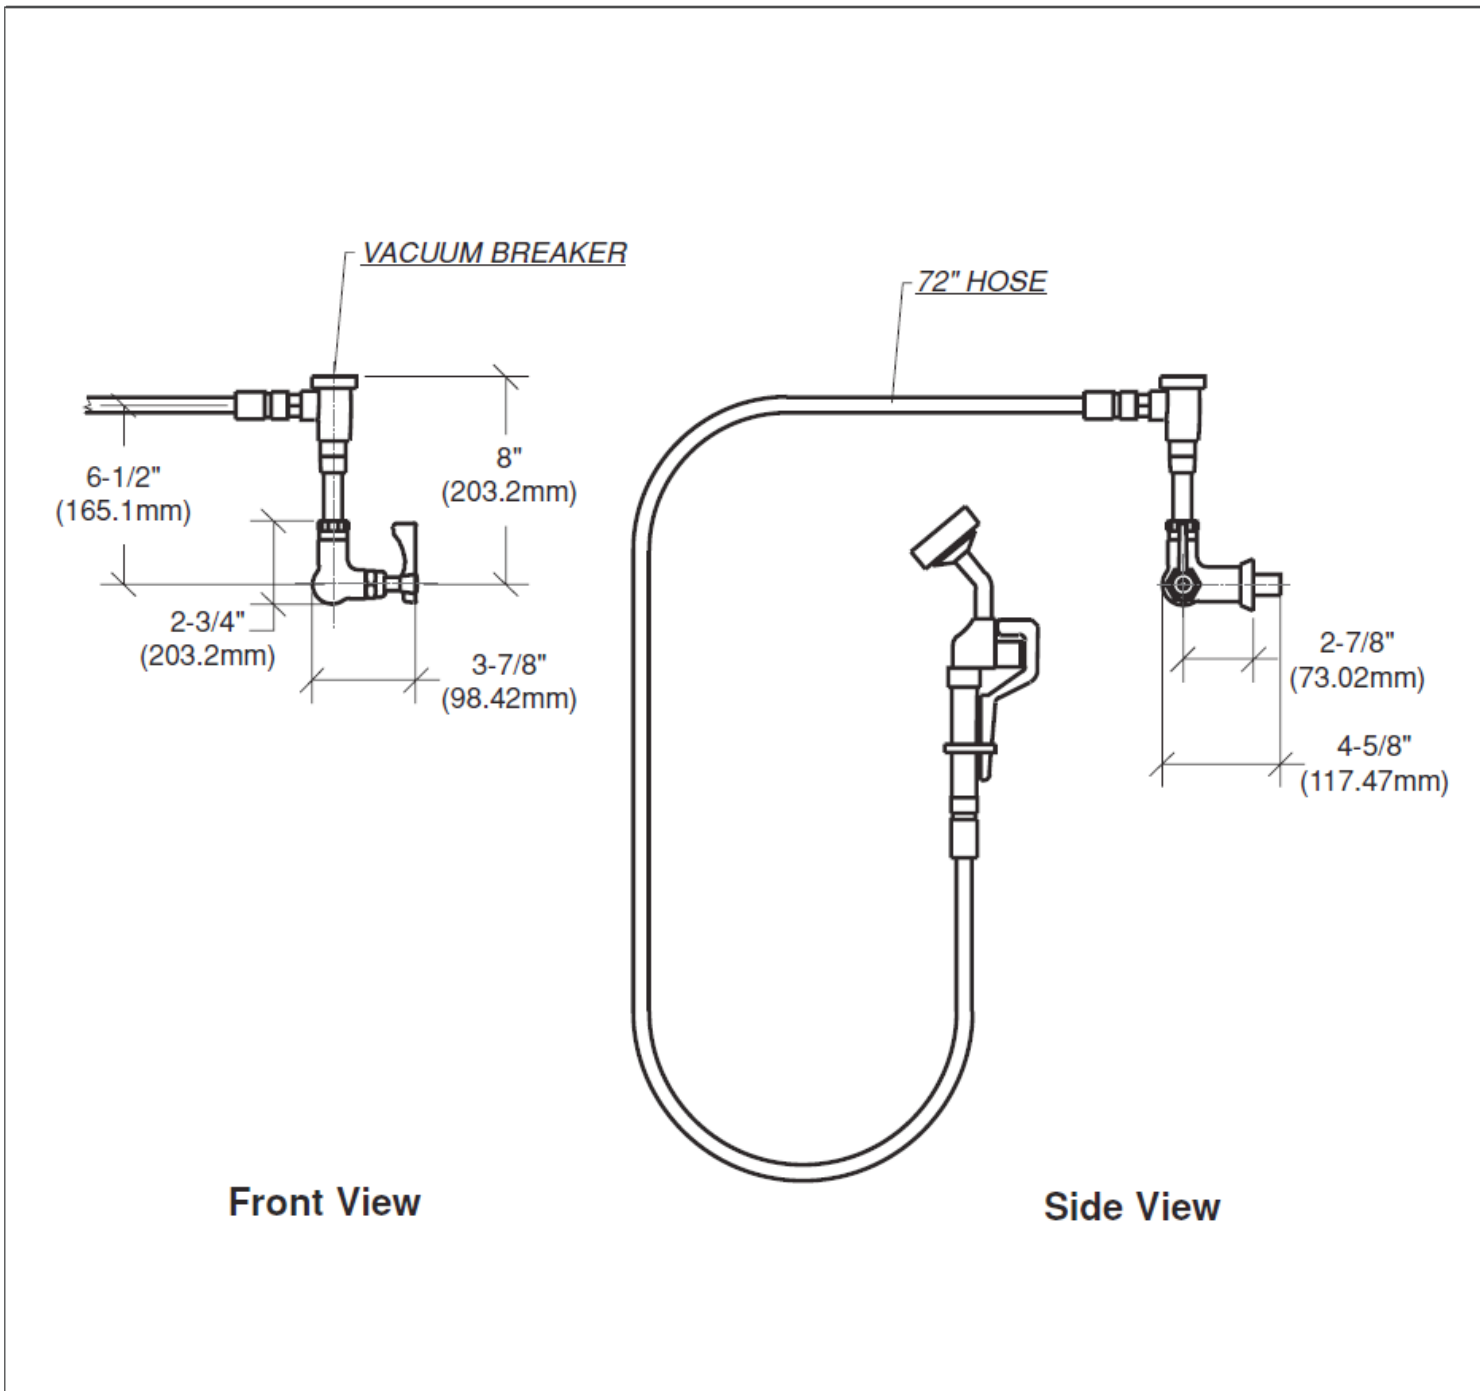

Certified to NSF/ANSI 61-G

APPROVED BY:

Due to our commitment to continued product improvement, specifications are subject to change without notice.

CERTIFICATIONS:

Printed in the USA

Krowne Metal Corporation

100 Haul Rd. Wayne, NJ 07470 • Toll Free: (800) 631-0442 • Fax: (973) 872-1129

sales@krowne.com • www.krowne.com • www.facebook.com/KrowneMetal • www.twitter.com/KrowneMetal

Rev. 09/2011
No. 19-101L