

# Scotsman®

## MDT2C12 – TouchFree® Ice Machine / Dispenser

### Cubelet Ice Machine / Dispenser



#### Features

Makes and dispenses cubelet ice, which is a harder, slow-melting ice form that allows for more reliable and easier dispensing.

Sleek, high-tech styled design with durable plastic front and top panels.

Quiet operation, ideal for hospital floors, cafeterias and offices.

Plastic chute easily removed for sterilization.

TouchFree® actuation provides convenient one-hand operations and eliminates the risk of cross contamination.

Flexible utility location.

Bigger sink allowing more clearance for larger containers.

#### 24 Hour Volume Production

##### Air Cooled

70°F/21°C 50°F/10°C lb/kg	Air Water	90°F/32°C 70°F/21°C lb/kg
273/124		198/90



#### Lighted Key-Pad for Dispensing Selection



Select either ice-only, ice and water, water only or dispensing for pitchers with simple touch of a button.

#### Cublet Ice



Hard, slow-melting ice that allows for more reliable dispensing.

1<sup>9</sup>/<sub>32</sub>" x 5<sup>1</sup>/<sub>16</sub>" x 5<sup>1</sup>/<sub>8</sub>"  
(1.5 x 0.8 x 1.9 cm)

#### Warranty


- 2 years parts and labor on all components.
- 5 years parts on compressor.

Warranty valid in North, South & Central America.  
Contact factory for warranty in other regions.

Scotsman Ice Systems  
775 Corporate Woods Parkway  
Vernon Hills, IL 60061

1-800-SCOTSMAN  
Fax: 847-913-9844  
E-mail: [customer.service@scotsman-ice.com](mailto:customer.service@scotsman-ice.com)

[www.scotsman-ice.com](http://www.scotsman-ice.com)

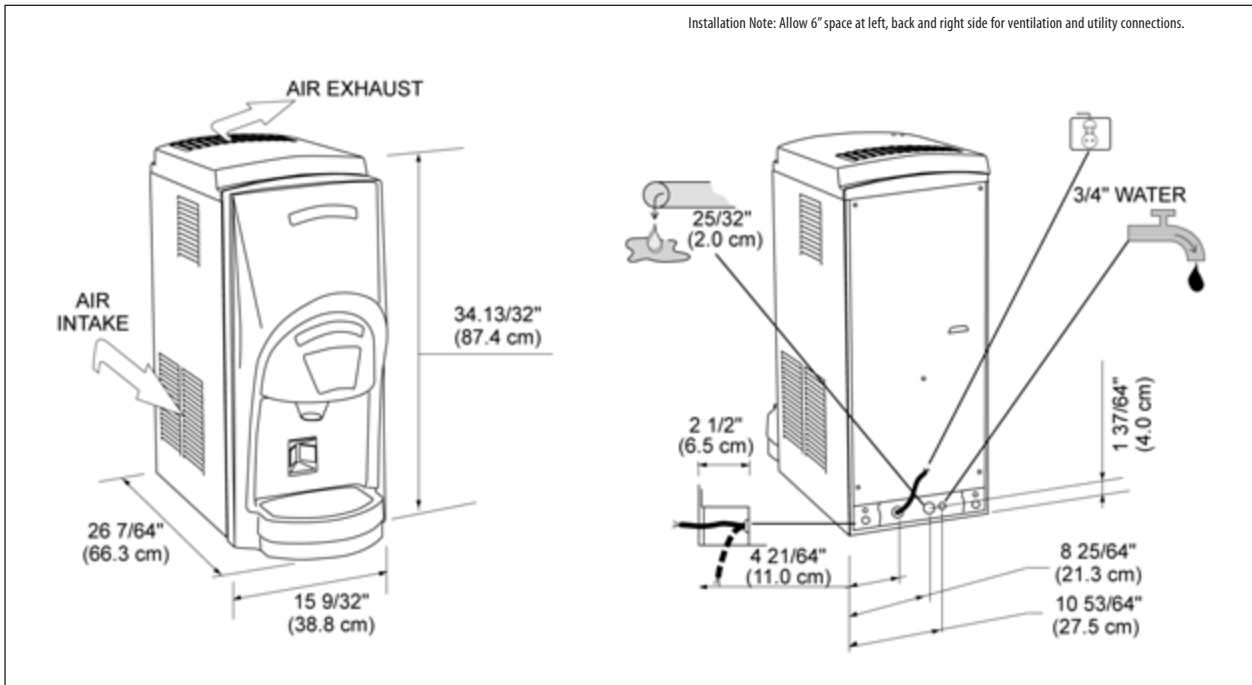

## Specifications

Model Number	Condenser Unit	Storage Capacity lb/kg	Basic Electrical Volts/Hz/Phase	Max. Fuse Size or HACR Circuit Breaker (amps)	Circuit Wires	Total Load Amps	Energy Consumption kWh/100 lb (45.4 kg) 90°F(32°C)/70°F(21°C)	Water Usage Gallons/100 lb (liters/45.4 kg)	
								Potable 90°F(32°C)/70°F(21°C)	Condenser 90°F(32°C)/70°F(21°C)
MDT2C12A-1	Air	12/5	115/60/1	15	2	6.0	13.0	24/90.99	-

All units with stainless steel finish and plastic front and top panels. Not designed for outdoor installations.

Refrigerant: R-134a

## All Models

Dimensions (W x D x H):

Unit:

15.28" x 26.11" x 34.41"  
(38.8 x 66.3 x 87.4 cm)

Shipping Carton:

18" x 28" x 36"  
(45.7 x 71.1 x 91.4 cm)

Shipping Weight:

140 lb / 64 kg

## Operating Requirements

	Minimum	Maximum
<b>Air Temperatures</b>	50°F (10°C)	100°F (38°C)
<b>Water Temperatures</b>	40°F (4.4°C)	100°F (38°C)
<b>Remote Cond. Temps</b>	-20°F (-29°C)	120°F (49°C)
<b>Water Pressures</b>	20 PSIG (1.4 bar)	80 PSIG (5.5 bar)
<b>Electrical Voltage</b>	-5%	+10%

\* Scotsman recommends all ice machines have water filtration. See Scotsman Sanitation Matrix for details.

Specifications and design are subject to change without notice.

Scotsman Ice Systems  
775 Corporate Woods Parkway  
Vernon Hills, IL 60061

1-800-SCOTSMAN  
Fax: 847-913-9844  
E-mail: [customer.service@scotsman-ice.com](mailto:customer.service@scotsman-ice.com)

[www.scotsman-ice.com](http://www.scotsman-ice.com)