



L-1X16
Chemical Sanitizing
Undercounter
Dishwasher



FEATURES:

- **Energy Star Qualified.**
- 30 racks / 120 covers per hour.
- Economical to operate. Uses only 1.7 gallons of water per cycle.
- All stainless steel construction assures long life and years of trouble free operation.
- 16" high door opening allows the washing of larger items.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps.
- Built-in chemical pumps and delimiting system assures proper chemical usage.
- Convenient to service "Works-in-a-drawer". All electrical components are attached to a sliding drawer for easy access and service.
- Pumped drain allows for flexible installation. Requires no floor drain.
- Pump purging system improves results by eliminating soil and chemical carryover during rinse cycle.



Optional dishtable, faucet and pre-rinse unit sold separately.



Pumped drain will drain uphill. Requires no floor drain.



Upper and lower rotating wash arms guarantee excellent results.



"Works-in-a-drawer", may be removed by disconnecting wires from terminal block.




Optional pedestal allows the L-1X16 to be raised up to a full 12" off the floor for easy operator use. Height adjustable from 8" to 14".





L-1X16
Chemical Sanitizing Undercounter Dishwasher

WARNING: Plumbing connections must be made by a qualified service company who will comply with all available Federal, State, and Local Health, Plumbing and Safety codes.

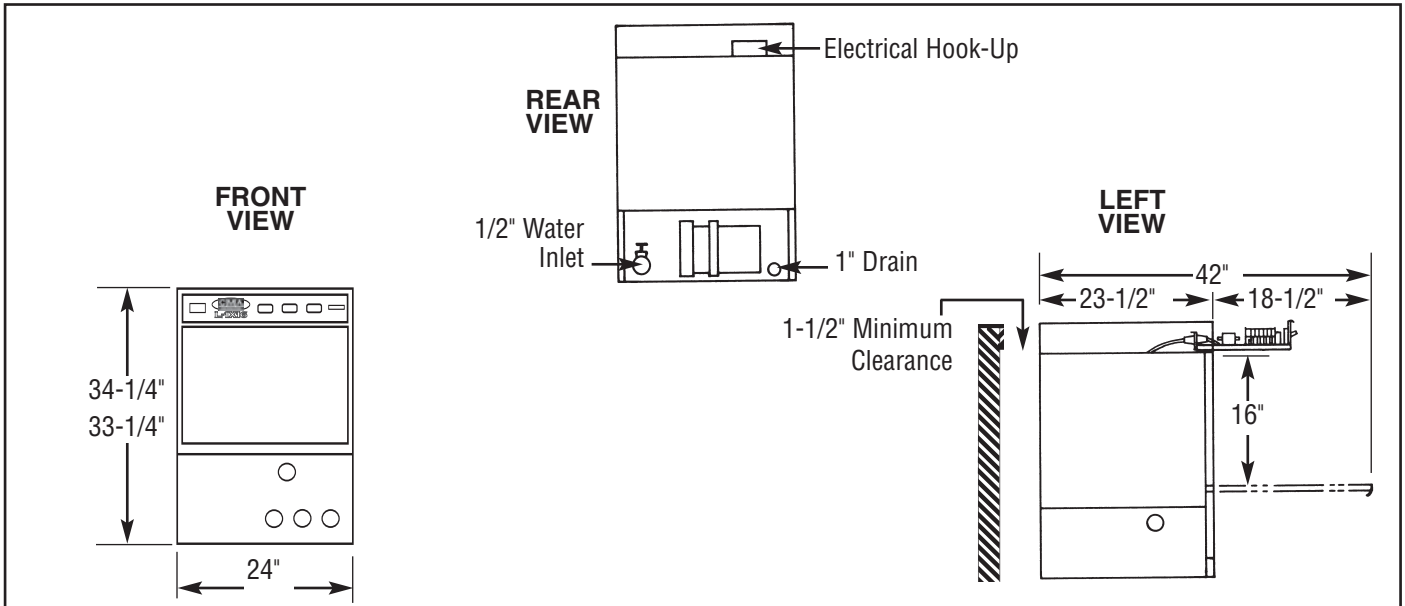

Specifications:

MODEL L-1X16	USA	METRIC	USA	METRIC
OPERATING CAPACITY				
RACKS PER HOUR (NSF RATED)	30	30		
OPERATING CYCLE				
WASH TIME-SEC	57	57		
RINSE TIME-SEC	48	48		
DWELL/PURGE-SEC	15	15		
TOTAL CYCLE TIME	120	120		
WASH TANK CAPACITY	1.7 GAL.	(6.43 L)		
WASH PUMP CAPACITY	35 GPM	(132 LPM)		
OPERATING TEMPERATURE				
REQUIRED	120°F	(49°C)		
RECOMMENDED	140°F	(60°C)		
WATER CONSUMPTION				
PER RACK	1.7 GAL.	(6.43 L)		
PER HOUR	40.8 GPH	(154.4 LPH)		
WATER INLET	1/2"	(1.27cm)		
DRAIN	1"	(2.54cm)		
WASH PUMP MOTORS HP			1	1
DIMENSIONS				
DEPTH			23-1/2"	(59cm)
WIDTH			24"	(61cm)
HEIGHT			33-1/4"-34-1/4"	(84-86 cm)
MAXIMUM CLEARANCE				
HEIGHT FOR DISHES			16"	(40.64cm)
STANDARD DISHRACK			1	1
DIMENSIONS			19-3/4"X19-3/4"	(50X50cm)
ELECTRICAL RATING			VOLTS	AMPS
			115	16
SHIPPING WEIGHT				
APPROXIMATE			196#	(88kg)

Summary Specifications: Model L-1X16

CMA Energy Mizer model L-1X16, low temperature, undercounter, chemical sanitizing, commercial dishwasher meets NSF, UL and CUL sanitation and construction standards WITHOUT the use of BOOSTER or TANK HEATERS. The model L-1X16 is constructed entirely of stainless steel. Each unit automatically washes, rinses and sanitizes food service utensils in standard 19-3/4"X19-3/4" racks. Unit comes standard with upper and lower stainless steel wash arms. The L-1X16 incorporates a pump purging system that improves results by eliminating soil and chemical carryover during rinse cycle.

Available Options

- Sustainer Heater
- Sanitizer Alarm
- CMA Temp-Sure™ (Self contained 12kW heater)
- Stainless Steel Legs 4" and 6" (set of 4)
- Stainless Steel Pedestal (Raises machine 8"-14" off the floor)
- 48" Undercounter Dishtable
- Electrical Variations Available

