



BEVERAGE-AIR

3779 Champion Blvd., Winston-Salem, NC 27105
1-888-845-9800 Fax# 1-336-245-6453
<http://www.Beverage-Air.com>

Commercial Refrigeration Equipment General Specification

WTR AND WTF—SERIES WORKTOP UNITS

Select from 5 standard sizes in widths of 41" (1 door), 46" (1 door), 67" (2 door), 93" (3 door), and 119" (4 door). Working height* is 35 1/2" with units installed on 6 inch casters (2 with brakes).

CABINET CONSTRUCTION

Heavy duty construction includes stainless steel on front, sides, door(s) and grille. Worktop is stainless steel with built-in back-splash. Cabinet back and bottom are galvanized steel. Interior liner is made of anodized aluminum for longer lasting corrosion protection. Interior thermometer is standard.

Cabinets are insulated with foamed-in-place polyurethane insulation of 2" minimum thickness. Work tops are 2 1/2". Doors are mounted to cabinet on self-closing, cartridge style hinges with 120° stay open feature. Door openings include low wattage, anti-condensate heaters (WTF67A only). A plug-in type vinyl magnetic gasket is attached to each door for positive seal. Convenient, contoured, pull handle is made of black anodized aluminum. Interior arrangement includes 2 steel wire epoxy coated shelves behind each door, adjustable in 1/2 inch increments.

REFRIGERATION

Balanced refrigeration systems used in all 5 sizes of self-contained refrigerated worktops provide high humidity storage of product at 35°F to 38°F. One size worktop freezer WTF67 holds product at 0°F and below. Unit is equipped with time activated, temperature terminated, electric defrost. Refrigerants include CFC-free R134a in refrigerators and 404A in freezers.

ELECTRICAL

Units wired at factory and ready for connection to a 115/60/1 phase, 15 amp dedicated outlet.

SPECIAL FEATURES

- WTR67A has earned the ENERGY STAR®.
- 6" casters, two with brakes standard.
- Optional 6" legs or 3" casters available

Item No. _____
Quantity _____

WORK TOP REFRIGERATORS AND FREEZER WORKTOP FREEZER 32" BASE MODEL SERIES

MODELS:
WTR41
WTR46A
WTR67A
WTR93A
WTR119A
WTF67A



WTR46



WTR67/WTF67

WTR67A has earned the ENERGY STAR.

ELECTRICAL CONNECTION

Units pre-wired at factory and include 8' long cord and plug set.



115/60/1
NEMA-5-15P

*Note: Overall heights of casters may vary with different types of casters depending upon caster manufacturer designations.

Available From:



Model Specified _____

Store# _____

Location _____

Quantity _____



Work Top Refrigerators and Freezer

Models: WTR41, WTR46A, WTR67A, WTR93A, WTR119A, WTF67A


| MODEL | WTR41 | WTR46A | WTR67A | WTR93A | WTR119A | WTF67A |
|--|-------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| EXTERNAL DIMENSIONAL DATA | | | | | | |
| Length Overall (inches) | 41" | 46" | 67" | 93" | 119" | 67" |
| Length Overall (mm) | 1041 | 1168 | 1702 | 2362 | 3023 | 1702 |
| Depth Overall (inches) - Less handle | 32" | 32" | 32" | 32" | 32" | 32" |
| Depth Overall (mm) - Less handle | 813 | 813 | 813 | 813 | 813 | 813 |
| Height Overall—on 6" casters (inches)* | 39 1/2" | 39 1/2" | 39 1/2" | 39 1/2" | 39 1/2" | 39 1/2" |
| Height Overall—on 6" casters (mm)* | 1003 | 1003 | 1003 | 1003 | 1003 | 1003 |
| Depth with Door Open 90 ° | 55 3/8" | 55 3/8" | 55 3/8" | 55 3/8" | 55 3/8" | 55 3/8" |
| Clear Door Opening (inches) | 21 1/2" x 23 1/2" | 21 1/2" x 23 1/2" | 21 1/2" x 23 1/2" | 21 1/2" x 23 1/2" | 21 1/2" x 23 1/2" | 21 1/2" x 23 1/2" |
| Number of doors | 1 | 1 | 2 | 3 | 4 | 2 |
| INTERNAL DIMENSIONAL DATA | | | | | | |
| NET Capacity (cubic ft.) | 14.75 | 16.7 | 27 | 39.8 | 52.5 | 27 |
| NET Capacity (Liters) | 418 | 473 | 765 | 1127 | 1487 | 765 |
| Internal Length Overall (inches) | 19" | 22" | 48" | 74" | 100 1/8" | 48" |
| Internal Length Overall (mm) | 483 | 559 | 1219 | 1880 | 2543 | 1219 |
| Internal Depth Overall (inches) | 28" | 28" | 28" | 28" | 28" | 28" |
| Internal Depth Overall (mm) | 711 | 711 | 711 | 711 | 711 | 711 |
| Internal Height Overall (inches) | 25" | 25" | 25" | 25" | 25" | 25" |
| Internal Height Overall (mm) | 635 | 635 | 635 | 635 | 635 | 635 |
| Number of shelves | 2 | 2 | 4 | 6 | 8 | 4 |
| ELECTRICAL DATA | | | | | | |
| Full Load Amperes 115/60/1 | 6.3 | 6.3 | 6.3 | 8.6 | 8.6 | 8.6 |
| ENERGY CONSUMPTION (KWH) | | | | | | |
| | n/a | 2.81 | 2.56 | 3.49 | 3.91 | 15.3 |
| REFRIGERATION DATA | | | | | | |
| Horsepower | 1/4 | 1/4 | 1/4 | 1/3 | 1/3 | 3/4 |
| WEIGHT DATA | | | | | | |
| Gross Weight (Crated lbs) | 295 | 330 | 420 | 546 | 675 | 431 |
| Gross Weight (Crated kg) | 134 | 150 | 191 | 248 | 306 | 196 |

*Note: Overall heights of casters may vary with different types of casters depending upon caster manufacturer designations.




PLAN VIEWS

COMMON
END
VIEW




LEFT SIDE VIEW




FRONT VIEW

WTR41




FRONT VIEW

WTR46A

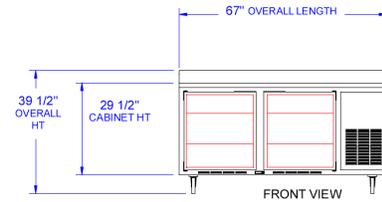

FRONT VIEW


WTR67A

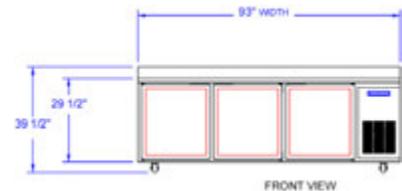

FRONT VIEW


WTR93A

WTR119A

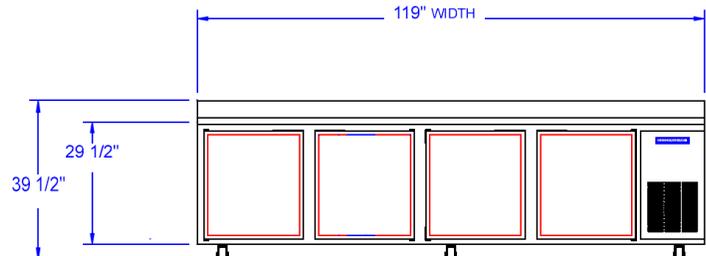

FRONT VIEW

WTF67A

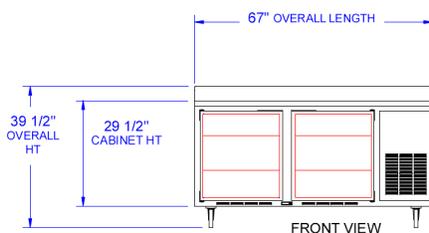

FRONT VIEW

BEVERAGE-AIR® CORPORATION

3779 Champion Blvd. • Winston-Salem, NC 27105 USA • (336) 245-6400 • Fax (336) 245-6453 • (888) 845-9800 • www.beverage-air.com

Specifications are subject to change without prior notice. 09/11