# **Scotsman**<sup>®</sup>

# MDT5N25 – TouchFree® Ice Machine / Dispenser

### Nugget Ice Machine / Dispenser



#### Features

Makes and dispenses soft, chewable nugget ice.

Sleek, european design with attractive rounded corners and informative instruction labels.

Up to 25% less fan noise allows installation of the unit in the quietest hallways.

Improved dispensing with easier access and room for most containers.

TouchFree® actuation provides convenient one-hand operations and eliminates the risk of cross contamination.

Flexible utility location.

### 24 Hour Volume Production

Air Cooled	Water Co	oled	c (UL) us	(NSE)
70°F/21°C Air 90°F/32°C 50°F/10°C Water 70°F/21°C Ib/kg Ib/kg Ib/kg	70°F/21°C Air 50°F/10°C Water Ib/kg	90°F/32°C 70°F/21°C lb/kg		CERTIFIED
523/237 409/186	525/239	455/207		9001:2000
Sanitary One Hand Operation			_	
Easily fills various sizes and types of containers.				

Nugget Ice



The Original Chewable Ice™! Easy to chew, cools drinks rapidly.


### Warranty

2 years parts and labor on all components. 5 years parts on compressor.

Warranty valid in North, South & Central America. Contact factory for warranty in other regions.

Scotsman Ice Systems 775 Corporate Woods Parkway Vernon Hills, IL 60061 1-800-SCOTSMAN Fax: 847-913-9844 E-mail: customer.service@scotsman-ice.com www.scotsman-ice.com

# **Scotsman**<sup>®</sup>

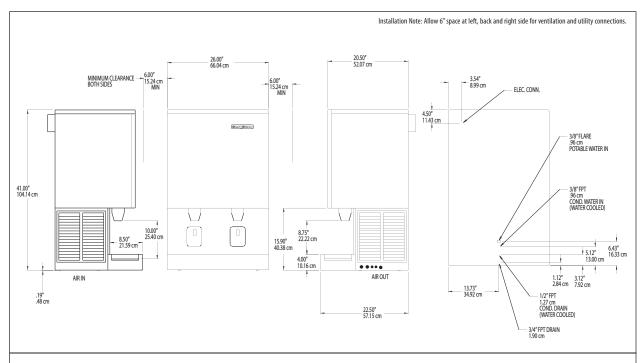

### Specifications

Gallons/100 lb (liters/45.4 kg)			(liters/45.4 kg)						
Model Number	Condenser Unit	Storage Capacity lb/kg	Basic Electrical Volts/Hz/ Phase	Max. Fuse Size or HACR Circuit Breaker (amps)	Circuit Wires	Min. Circuit Ampacity	Energy Consumption kWh/100 lb (45.4 kg) 90°F(32°C)/70°F(21°C)	Potable 90°F(32°C)/ 70°F(21°C)	Condenser 90°F(32°C)/ 70°F(21°C)
MDT5N25AS-1J	Air	26/12	115/60/1	30	2	20.7	5.4	12/45.5	-
MDT5N25WS-1J	Water	26/12	115/60/1	25	2	19.4	4.0	12/45.5	97.0/367.8

All units are stainless steel. Not designed for outdoor installations.

26" x 22.5" x 41" (66 x 57.2 x 104 cm)

30" x 24" x 46" (76.2 x 61 x 116.8 cm)

260 lb / 118 kg

Refrigerant: R-4044a

### All Models

Shipping Carton:

Shipping Weight:

Unit:

Dimensions (W x D x H):

### Accessories

DMS21S-BMachine Stand for MDT5N25, MDT5N40KWB3Wall Mounting Kit for MDT5N25, MDT5N40KSP5Splash Panel Kit for MDT5N25, MDT5N40KPC-MDTPortion Control Kit for MDT3, MDT4, MDT5 & MDT6	Description
KSP5 Splash Panel Kit for MDT5N25, MDT5N40	Machine Stand for MDT5N25, MDT5N40
	Wall Mounting Kit for MDT5N25, MDT5N40
KPC-MDT Portion Control Kit for MDT3, MDT4, MDT5 & MDT6	Splash Panel Kit for MDT5N25, MDT5N40
	Portion Control Kit for MDT3, MDT4, MDT5 & MDT6
KTPS-MDT Tamper Proof Screw Kit (including tool) to convert 1 MDT Disp	Tamper Proof Screw Kit (including tool) to convert 1 MDT Dispenser
KTPS-MDT	

\* Scotsman recommends all ice machines have water filtration. See Scotsman Sanitation Matrix for details.

### **Operating Requirements**

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	100°F (38°C)
Remote Cond. Temps	-20°F (-29°C)	120°F (49°C)
Water Pressures	20 PSIG (1.4 bar)	120 PSIG (5.5 bar)
Electrical Voltage	-5%	+10%

Specifications and design are subject to change without notice.

Scotsman Ice Systems 775 Corporate Woods Parkway Vernon Hills, IL 60061 1-800-SCOTSMAN Fax: 847-913-9844 E-mail: customer.service@scotsman-ice.com



Water Usage