## **Scotsman**<sup>®</sup>

# MDT5N40 – TouchFree® Ice Machine / Dispenser

## Nugget Ice Machine / Dispenser



#### Features

Makes and dispenses soft, chewable nugget ice.

Sleek, european design with attractive rounded corners and informative instruction labels.

Up to 25% less fan noise allows installation of the unit in the quietest hallways.

Improved dispensing with easier access and room for most containers.

TouchFree® actuation provides convenient one-hand operations and eliminates the risk of cross contamination.

Flexible utility location.

## 24 Hour Volume Production

Air Cooled	Water Cooled	c (UL) us	(NSE)
70°F/21°C Air 90°F/32°C 50°F/10°C Water 70'F/21°C Ib/kg Ib/kg	70°F/21°C Air 90°F/32°C 50°F/10°C Water 70°F/21°C lb/kg lb/kg		
523/237 409/186	525/239 455/207		9001:2000
Sanitary One Hand Operation			



Easily fills various sizes and types of containers.

## Nugget Ice



The Original Chewable Ice™! Easy to chew, cools drinks rapidly.

## Warranty


2 years parts and labor on all components. 5 years parts on compressor.

Warranty valid in North, South & Central America. Contact factory for warranty in other regions.

Scotsman Ice Systems 775 Corporate Woods Parkway Vernon Hills, IL 60061 1-800-SCOTSMAN Fax: 847-913-9844 E-mail: customer.service@scotsman-ice.com www.scotsman-ice.com

#### Elite Restaurant Equipment

# **Scotsman**<sup>®</sup>

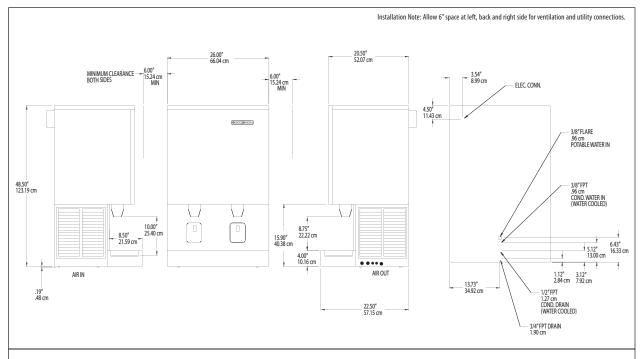

## Specifications

	Gallons/100 lb (liters/4					(liters/45.4 kg)	l			
Model Number	Condenser Unit	Storage Capacity lb/kg	Basic Electrical Volts/Hz/ Phase	Max. Fuse Size or HACR Circuit Breaker (amps)	Circuit Wires	Min. Circuit Ampacity	Energy Consumption kWh/100 lb (45.4 kg) 90°F(32°C)/70°F(21°C)	Potable 90°F(32°C)/ 70°F(21°C)	Condenser 90°F(32°C)/ 70°F(21°C)	
MDT5N40AS-1J	Air	40/18	115/60/1	30	2	20.7	5.4	12/45.5	-	
MDT5N40WS-1J	Water	40/18	115/60/1	25	2	19.4	4.0	12/45.5	97.0/367.8	

All units are stainless steel. Not designed for outdoor installations.

26" x 22.5" x 48" (66 x 57.2 x 123 cm)

30" x 24" x 53" (76.2 x 61 x 134.6 cm)

280 lb / 127 kg

Refrigerant: R-4044a

## All Models

Shipping Carton:

Shipping Weight:

Unit:

Dimensions (W x D x H):

### Accessories

DMS21S-B	Machine Stand for MDT5N25, MDT5N40
KWB3	Wall Mounting Kit for MDT5N25, MDT5N40
KSP5	Splash Panel Kit for MDT5N25, MDT5N40
KPC-MDT	Portion Control Kit for MDT3, MDT4, MDT5 & MDT6
KTPS-MDT	Tamper Proof Screw Kit (including tool) to convert 1 MDT Dispense

\* Scotsman recommends all ice machines have water filtration. See Scotsman Sanitation Matrix for details.

### **Operating Requirements**

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	100°F (38°C)
Remote Cond. Temps	-20°F (-29°C)	120°F (49°C)
Water Pressures	20 PSIG (1.4 bar)	120 PSIG (5.5 bar)
Electrical Voltage	-5%	+10%

Specifications and design are subject to change without notice.

Scotsman Ice Systems 775 Corporate Woods Parkway Vernon Hills, IL 60061 1-800-SCOTSMAN Fax: 847-913-9844 E-mail: customer.service@scotsman-ice.com



Water Usage